





## PRODUCT VIEW

4/4-colored euroscale, double sided printing

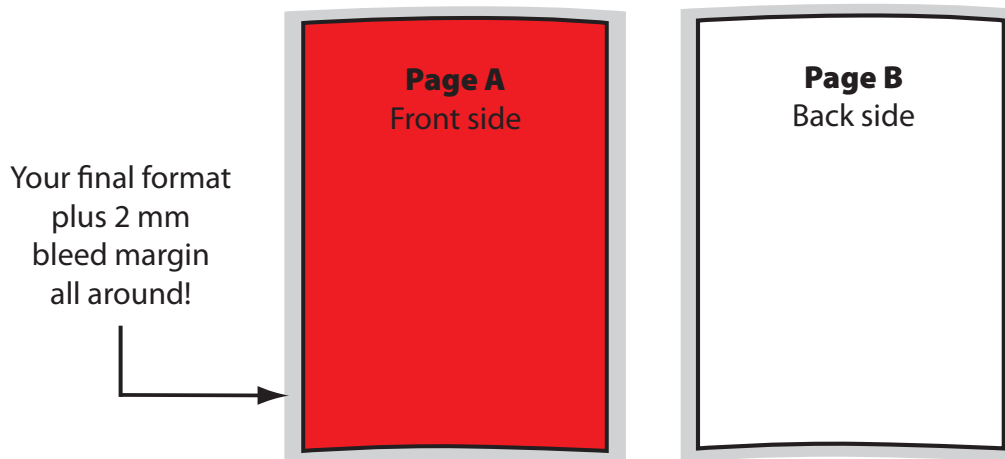

## DATA STRUCTURE:


- Color mode CMYK, resolution at least 300 dpi (line drawing 1200 dpi).
- Bleed 2 mm circumferential, no crop marks
- 5 mm safety margin for texts, images and graphics, which must not be cut off.
- 300 % maximum inking.
- Black areas on coated paper have to be printed with 60% C (cyan) und 100 % K (black), on uncoated paper with 40 % C (cyan) and 100 % K (black).
- Black letters and types have to be printed with 100 % K (black) only.

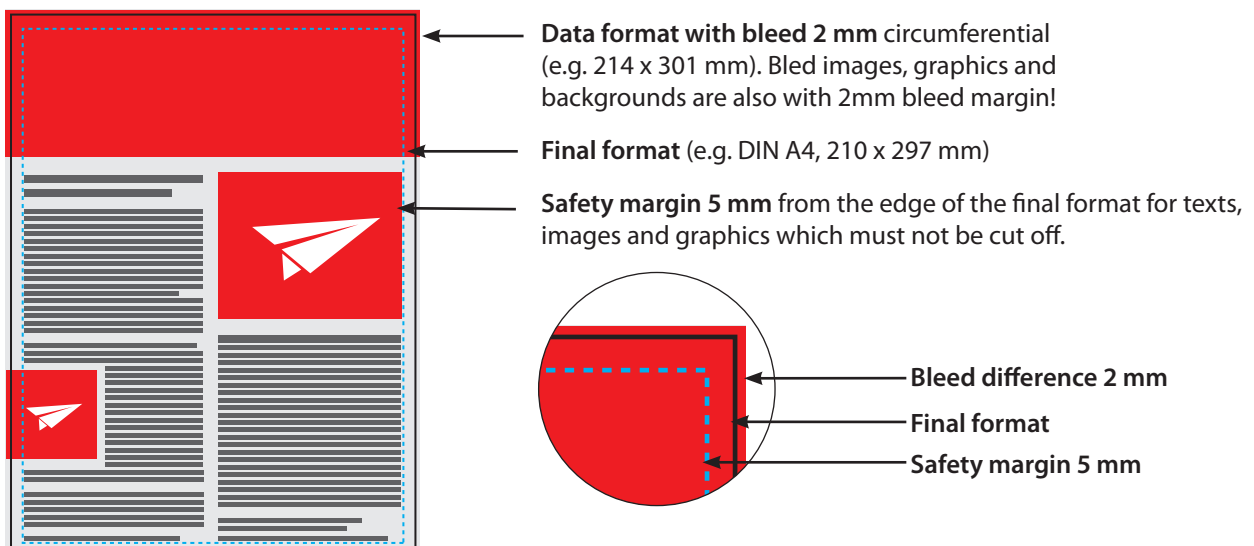



## PRODUCT VIEW

4/0-colored euroscale

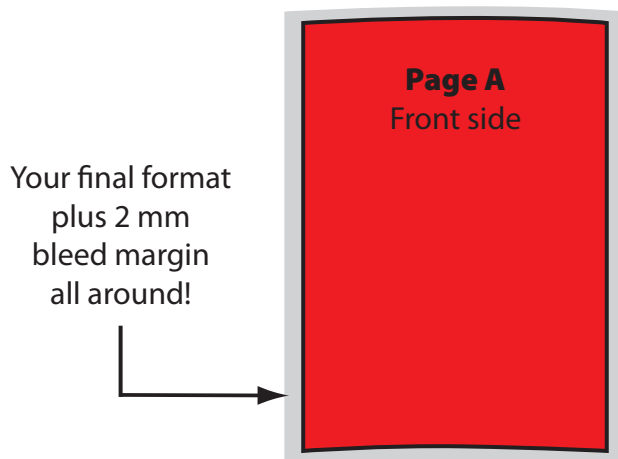

## DATA STRUCTURE:

- Color mode CMYK, resolution at least 300 dpi (line drawing 1200 dpi).
- Bleed 2 mm circumferential, no crop marks
- 5 mm safety margin for texts, images and graphics, which must not be cut off.
- 300 % maximum inking.
- Black areas on coated paper have to be printed with 60% C (cyan) und 100 % K (black), on uncoated paper with 40 % C (cyan) and 100 % K (black).
- Black letters and types have to be printed with 100 % K (black) only.

